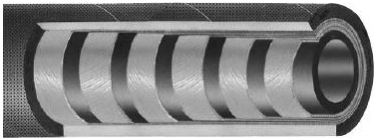

**PROflex 13**
**EN 856 / SAE 100 R13**

Inner Tube : synthetic rubber  
 Reinforcement : 4-6 very high tensile steel spirals  
 Cover : oil, abrasion, ozono and weather resistant synthetic rubber  
 Working Temperature : -40°C / +120°C

**EN 856 / SAE 100 R13**

Sottostrato : gomma sintetica  
 Rinforzo : 4-6 spirali in acciaio ad altissimo carico  
 Copertura : gomma sintetica resistente agli olii, ozono e agenti atmosferici  
 Temperatura di Esercizio : -40°C / +120°C

part nr. codice	ID			OD		WP		BP		MBR		TW	
	[in]	[mm]	size	[in]	[mm]	[psi]	[bar]	[psi]	[bar]	[in]	[mm]	[lb/ft]	[Kg/mt]
0141121312	3/4"	19,0	12	1,26	32,0	5004	345	20015	1380	9,46	240,0	1,117	1,665
0141121316	1"	25,4	16	1,51	38,4	5004	345	20015	1380	11,82	300,0	1,426	2,125
0141121320	1.1/4"	31,8	20	1,94	49,3	5004	345	20015	1380	16,55	420,0	2,664	3,970
0141121324	1.1/2"	38,1	24	2,26	57,3	5004	345	20015	1380	19,70	500,0	3,335	4,970
0141121332	2"	50,8	32	2,82	71,6	5004	345	20015	1380	24,82	630,0	4,395	6,550


**PROflex 15**
**SAE 100 R15**

Inner Tube : synthetic rubber  
 Reinforcement : 4-6 very high tensile steel spirals  
 Cover : oil, abrasion, ozono and weather resistant synthetic rubber  
 Working Temperature : -40°C / +120°C

**SAE 100 R15**

Sottostrato : gomma sintetica  
 Rinforzo : 4-6 spirali in acciaio ad altissimo carico  
 Copertura : gomma sintetica resistente agli olii, ozono e agenti atmosferici  
 Temperatura di Esercizio : -40°C / +120°C

part nr. codice	ID			OD		WP		BP		MBR		TW	
	[in]	[mm]	size	[in]	[mm]	[psi]	[bar]	[psi]	[bar]	[in]	[mm]	[lb/ft]	[Kg/mt]
0141121516	1"	25,4	16	1,51	38,4	6091	420	24365	1680	13,00	330,0	1,426	2,125
0141121520	1.1/4"	31,8	20	1,94	49,3	6091	420	24365	1680	17,53	445,0	2,664	3,970
0141121524	1.1/2"	38,1	24	2,26	57,3	6091	420	24365	1680	20,88	530,0	3,335	4,970