


**BSP PARALLEL MALE 60° FLARE**

**MASCHIO BSP CILINDRICO SV.60°**

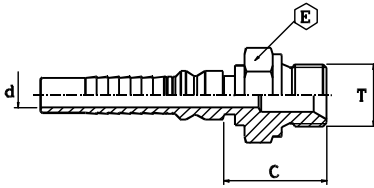


**KPMG**

part nr. codice	hose ID			thread T	d		E		cut-off C	
	[in]	[mm]	size		[in]	[mm]	[in]	[mm]	[in]	[mm]
0702001227	3/4"	19,0	12	3/4-14	0,55	14,0	1,26	32	1,30	33,0
0702001633	1"	25,4	16	1-11	0,79	20,0	1,50	38	1,46	37,0
0702002042	1.1/4"	31,8	20	1.1/4-11	1,02	26,0	1,97	50	1,65	42,0
0702002448	1.1/2"	38,1	24	1.1/2-11	1,26	32,0	2,17	55	1,73	44,0
0702003251	2"	50,8	32	2-11	1,65	42,0	2,76	70	2,09	53,0

**BSP TAPERED MALE 60° FLARE**

**MASCHIO BSP CONICO SV.60°**

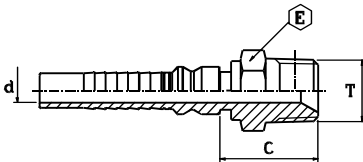


**KPMC**

part nr. codice	hose ID			thread T	d		E		cut-off C	
	[in]	[mm]	size		[in]	[mm]	[in]	[mm]	[in]	[mm]
0702011227	3/4"	19,0	12	3/4-14	0,55	14,0	1,18	30	1,38	35,0
0702011633	1"	25,4	16	1-11	0,79	20,0	1,42	36	1,62	41,0
0702012042	1.1/4"	31,8	20	1.1/4-11	1,02	26,0	1,81	46	1,73	44,0
0702012448	1.1/2"	38,1	24	1.1/2-11	1,26	32,0	1,97	50	1,85	47,0
0702013251	2"	50,8	32	2-11	1,65	42,0	2,56	65	2,13	54,0

**BSP FEMALE 60° FLARE WITH  
O'RING AND THRUST WIRE NUT**

**FEMMINA BSP SV.60° CON O'RING E DADO  
SPINATO**

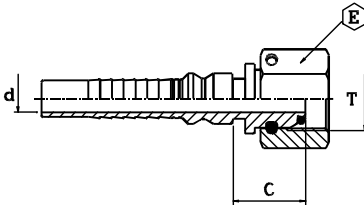


**KPFG**

part nr. codice	hose ID		size	thread T	d		E		cut-off C	
	[in]	[mm]			[in]	[mm]	[in]	[mm]	[in]	[mm]
0716401227	3/4"	19,0	12	3/4-14	0,55	14,0	1,26	32	0,91	23,0
0716401633	1"	25,4	16	1-11	0,79	20,0	1,50	38	1,02	26,0
0716402042	1.1/4"	31,8	20	1.1/4-11	1,02	26,0	1,97	50	1,14	29,0
0716402448	1.1/2"	38,1	24	1.1/2-11	1,26	32,0	2,17	55	1,22	31,0
0716403251	2"	50,8	32	2-11	1,65	42,0	2,76	70	1,18	30,0

**BSP FEMALE 60° FLARE WITH  
O'RING AND THRUST WIRE NUT -  
90° ELBOW**

**FEMMINA 90° BSP SV.60° CON O'RING E  
DADO SPINATO**

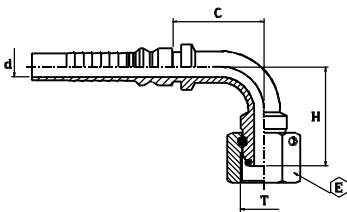


**KPFG-90**

part nr. codice	hose ID		size	thread T	d		E		cut-off C		drop H	
	[in]	[mm]			[in]	[mm]	[in]	[mm]	[in]	[mm]	[in]	[mm]
0727401227	3/4"	19,0	12	3/4-14	0,55	14,0	1,26	32	2,13	54,0	2,32	59,0
0727401633	1"	25,4	16	1-11	0,79	20,0	1,50	38	2,72	69,0	2,84	72,0
0727402042	1.1/4"	31,8	20	1.1/4-11	1,02	26,0	1,97	50	3,47	88,0	3,11	79,0
0727402448	1.1/2"	38,1	24	1.1/2-11	1,18	30,0	2,17	55	3,86	98,0	3,74	95,0
0727403251	2"	50,8	32	2-11	1,58	40,0	2,76	70	5,04	128,0	5,20	132,0

**BSP FEMALE 60° FLARE WITH  
O'RING AND THRUST WIRE NUT -  
45° ELBOW**

**FEMMINA 45° BSP SV.60° CON O'RING E  
DADO SPINATO**

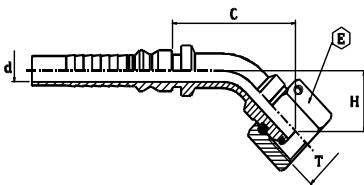

**KPFG-45**

part nr. codice	hose ID		size	thread T	d		E		cut-off C		drop H	
	[in]	[mm]			[in]	[mm]	[in]	[mm]	[in]	[mm]	[in]	[mm]
0728401227	3/4"	19,0	12	3/4-14	0,55	14,0	1,26	32	2,76	70,0	1,10	28,0
0728401633	1"	25,4	16	1-11	0,79	20,0	1,50	38	3,43	87,0	1,50	38,0
0728402042	1.1/4"	31,8	20	1.1/4-11	1,02	26,0	1,97	50	3,98	101,0	1,93	49,0
0728402448	1.1/2"	38,1	24	1.1/2-11	1,18	30,0	2,17	55	4,69	119,0	2,32	59,0
0728403251	2"	50,8	32	2-11	1,58	40,0	2,76	70	5,56	141,0	2,68	68,0